

Date:

Customer:

Reference:

MOTOR
Speed

one two
 VVVF ACVV

Voltage

380 400
 415

Frequency

50 Hz 60 Hz

Starts per hour

90 120
 180 240

Heat protection

no
 termistors
 termostats


DC Brake voltage

48 60 80 110 180/220


Traction sheave Ø:.....mm

Encoder

yes no
 only predisposition

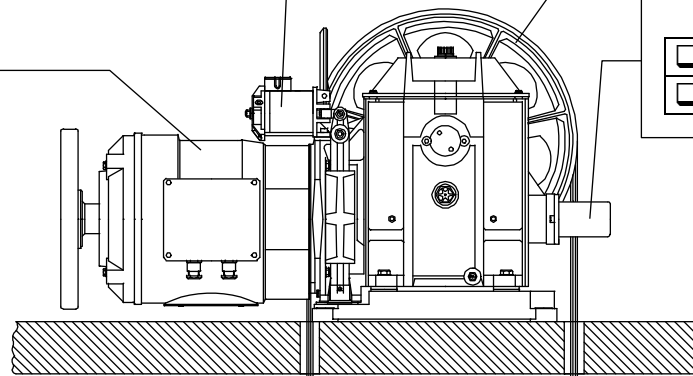

Machine hand



left right

Machine position

up down

Roping


1:1 2:1
 3:1 4:1

Car travel:.....m

Ropes
x
n° x Ø

Load into car:.....Kg

Car speed:.....m/s

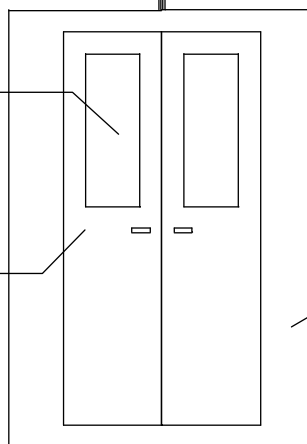

Counter-weight:.....Kg

Car frame weight:.....Kg

Compensation chain

yes no